


## PROGRAMING MENU AND INSTRUCTIONS

Menu	Options	Brief Description
Cold Temp Set	3° - 12°C	The cold temperature can be set between 3°C and 12°C or 37°F and 54°F, depending on which units are selected (°C or °F) in the F/C option.
	37° - 54°F	<b>Recommended/Default Setting is 5°C/41°F.</b>
Hot Temp Set	70°C - 95°C	The hot temperature can be set between 70°C and 95°C or 158°F and 203°F, depending on which units are selected (°C or °F) in the F/C option.
	158°F - 203°F	<b>Recommended/Default Setting is 87°C/189°F.</b>
Temp Display	Static	The display indicates the STATIC (SET POINT) temperature. <b>Default</b>
	Ranging	The display indicates the ACTUAL tank temperature
UV Timer	<b>3 minutes</b>	The UV Lamp lights every time you take a drink of cold water, and stays on for 3 minutes. <b>Recommended/Default Setting is 3 minutes</b>
	10 minutes	The UV Lamp lights every time you take a drink of cold water, and stays on for 10 minutes.
	Constant	The UV Lamp stays on when power is on. <b>Not Recommended</b>
F/C	°F	Temperatures are displayed in degrees Fahrenheit. <b>Default is °F</b>
	°C	Temperatures are displayed in degrees Celsius.
Language	<b>English</b>	The display will read in English. <b>Default is English</b>
	Spanish	The display will read in Spanish
	French, Etc.	The display will read in French, and many others...
Flow Counter	Liters (4000-9000)	<b>DO NOT USE.</b> "NO WATER SUPPLY" Fault will occur. Use Filters Timer Instead.
	Gallons (1000-3000)	<b>DO NOT USE.</b> "NO WATER SUPPLY" Fault will occur. Use Filters Timer Instead.
Filters Timer	3 months	Timer for Filters Life set at 3 months. Displays "Change Filters" after 3 months
	6 months	Timer for Filters Life set at 6 months. Displays "Change Filters" after 6 months
	9 months	Timer for Filters Life set at 9 months. Displays "Change Filters" after 9 months
	<b>None</b>	Timer for Filters Life is turned off. <b>Default is None</b>
Filters Life	<b>00 DAYS</b>	Indicates amount of water flowed(gal/liters) or days elapsed since last reset Ensure Filters Timer is enabled and Filters Life indicates DAYS
Energy Saving Sleep Mode	<b>On</b>	Shuts heater down (hot water) if not used in 3 hours. – <b>Default Sleep is ON</b>
	Off	Hot water remains powered indefinitely.
Default Set	<b>Cold</b>	Defaults Display & Dispense Selection to Cold after 3 seconds. <b>Default is Cold</b>
	Sparkling	Defaults Display & Dispense Selection to Sparkling after 3 seconds.
Reset	OK?	Resets the Filters Life to zero. Confirm by selecting Button 3 (Hot) to Save and Exit. This resets the timer.

## PROGRAMMING INSTRUCTIONS

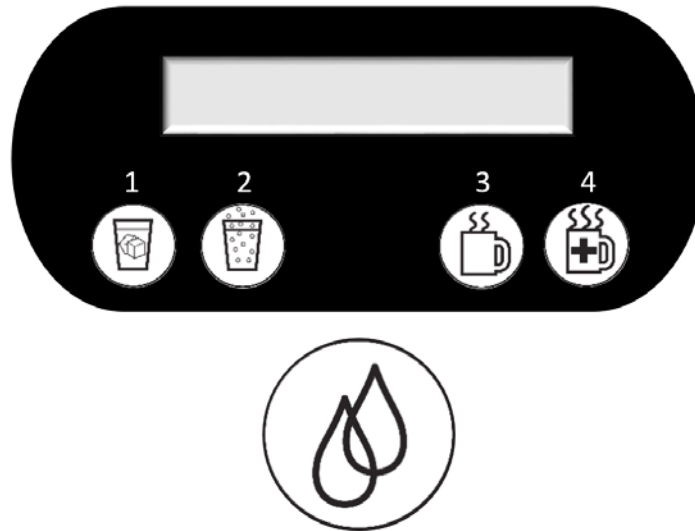

The above picture shows front LCD display and control Panel for the **Waterlogic WL500 Water Treatment System**.

Access the programming menu by depressing Buttons No. 1 and No. 2 simultaneously for three seconds until the Password Message appears on the display: Password \* \* \* \*

**PASSWORD IS: 1 1 1 1**

Press Button No. 1 until the number 1 is displayed

Press Button No. 2 to move to next field

Press Button No. 1 until the number 1 is displayed

Press Button No. 2 to move to next field and continue...until all 4 fields display 1 1 1 1

Press Button No. 3 to enter the password and access the programming mode.

Note: Unit will exit programming mode if no buttons are pressed within 5 seconds and return to display mode.

---

### **Programming Example: Change Language**

---

1. Press Buttons No. 1 and No. 2 for three seconds until “**Password \*\*\*\*\***” appears on the display. Enter 1 1 1 1 Password as shown above.
2. Press Button No. 2 repeatedly to scroll through the menu until the option “**Language**” appears on the display.
3. Press Button No. 3 to select the Language option.
4. Press Button No. 2 repeatedly to scroll down through the languages until Spanish is displayed).
5. Press Button No. 3 to select “**Spanish.**” This saves the selection.
6. Press Button No. 4 to exit programming mode.

---

### Programming Example: Change Language and Lower Cold Temp

---

1. Press Buttons No. 1 and No. 2 for three seconds until “**Password \*\*\*\***” appears on the display. Enter 1 1 1 1 Password as shown above.
2. Press Button No. 2 repeatedly until the menu scrolls to the option “**Language**” on the display.
3. Press Button No. 3 to select the Language option.
4. Press Button No. 1 repeatedly to scroll up through the language. (Spanish, French, English, and others).
5. Press Button No. 3 to select “**English.**”
6. Press Button No. 1 repeatedly until the menu scrolls up to the option “**Cold Temp Set**” on the display.
7. Press Button No. 3 to select the “Cold Temp Set” option.
8. Press Button No. 1 repeatedly until “**39F**” is displayed.
9. Press Button No. 3 to select “**39F.**”
10. Press Button No. 4 to exit Programming mode.